


FCV-M SERIES

FLOW CONTROL VALVES



- » Direct control of flow or temperature from your PID controller with 4–20 mA, 1–5 VDC or 1–10 VDC
- » Select flow limits from 10.4 to 133 LPM / 2.8 to 35 GPM
- » Fast: 8 seconds from 0 to 100% open
- » Compact design minimizes space requirements
- » 3400 steps provide fine, fast valve control
- » O-ring material selectable to match liquid and temperature range requirements
- » Connect directly to Tofpine configurable manifold components
- » FNPT, BSPT or SAE connection ports

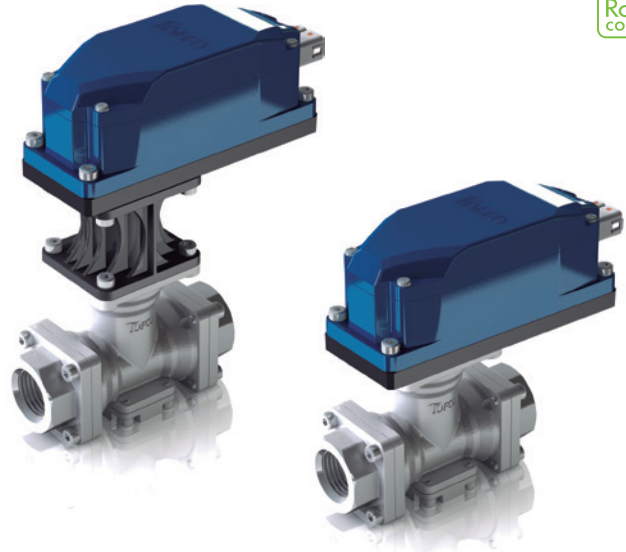


Direct-drive control valves operating from -40 to 130 °C with water, Galden®, Fluorinert™ and other advanced heat transfer fluids.

EXAMPLE APPLICATION

Direct control of output from a heat exchanger

FCV-M Series Flow Control Valves are controlled by an external PID controller using an accompanying driver unit.

Valve position is controlled and continuously monitored by the PID controller with a 4–20 mA or DC signal.


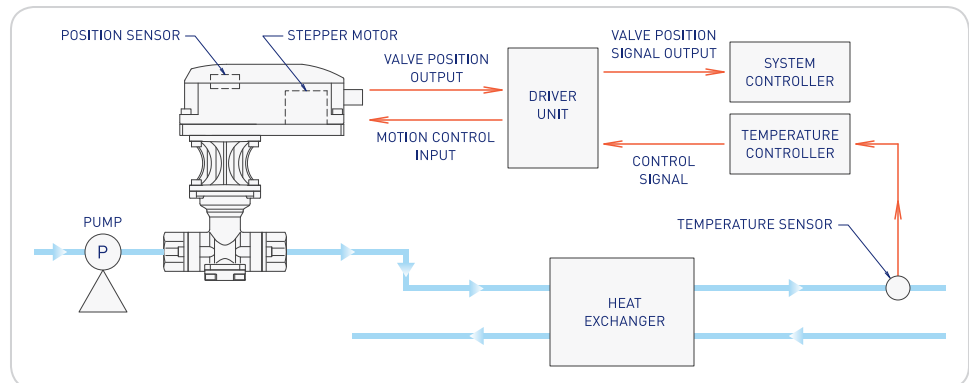


SPECIFICATIONS


Base Model	FCV-M25				FCV-M32	
Orifice Diameter (mm)	φ 3.0	φ 4.5	φ 6.0	φ 7.4	φ 7.4	φ 9.5
Flow Limit (Water at 0.4 MPa / 58 psi ΔP)	10.4 LPM	24.5 LPM	48.4 LPM	75 LPM	75 LPM	133 LPM
» Contact Proteus for flow limits with other liquids	2.8 GPM	6.5 GPM	12.8 GPM	20 GPM	20 GPM	35 GPM
Maximum Cv value (Water at 0.4 MPa / 58 psi ΔP)	0.36	0.85	1.68	2.61	2.61	4.63
Connection Size Options > FNPT or BSPT	1/4" • 3/8" • 1/2"				1/2" • 3/4"	
> SAE with O-ring Seal	9/16-18 • 3/4-16				3/4-16 • 1 1/16-12	
Fluid Types	Water, water/glycol mixtures, Galden®, Fluorinert™, silicone oils, etc.					
Fluid Temperature Options*	0–60°C • 0–130°C • -20–100°C • -40–130°C					
Ambient Environment	5–50°C; 30–80% relative humidity; non-condensing					
Maximum Applied Differential Pressure (ΔP)	0.4 MPa / 58 psi					
Maximum Operating Pressure	1.0 MPa / 145 psi					
Power Source	24 VDC ± 10%; 300 mA					
I/O Signal Options	4–20 mA • 1–5 VDC • 1–10 VDC					
Input Impedance	20Ω for 4–20 mA • 1MΩ for 1–5 VDC/1–10 VDC					
Output Allowable Load Resistance	< 300Ω for 4–20 mA • >1KΩ for 1–5 VDC/1–10 VDC					
Drive System	DC stepper motor					
Resolution of Valve Movement	~3400 steps					
Response Time (0 to 100% Open)	~8 seconds					
Hysteresis	< 1.5%					
Water and Dust Proofing	IP67					
Wetted Materials*	304 Stainless Steel, filled PTFE • Buna-N, EPDM, Silicone rubber, Viton®					

*Depends on fluid type.


FLOW CHARACTERISTICS

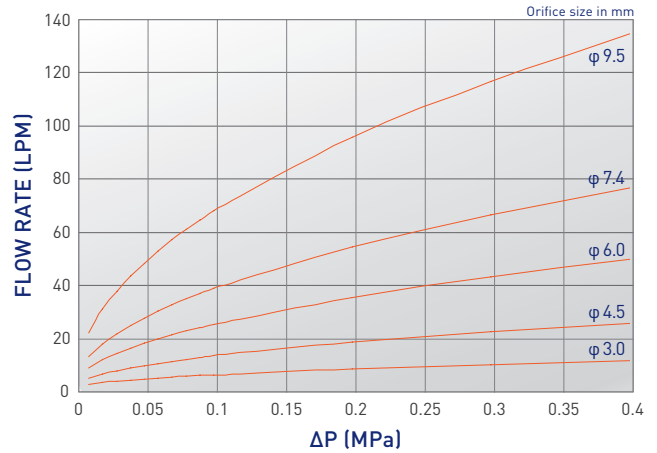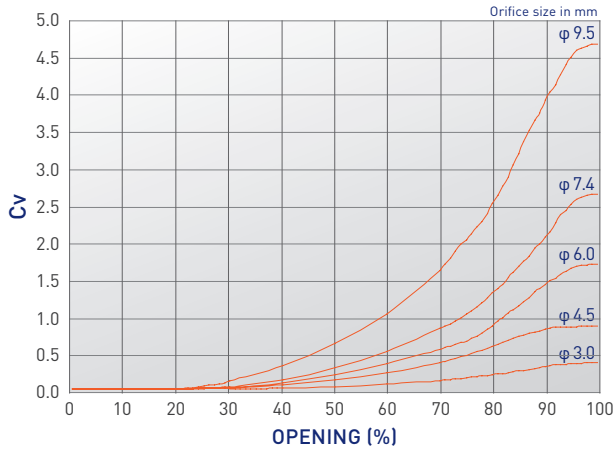

INTERCONNECTION

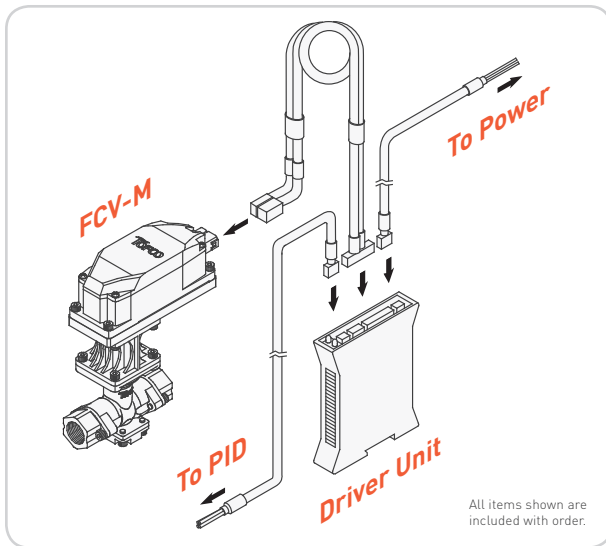

EXAMPLE DIMENSIONS

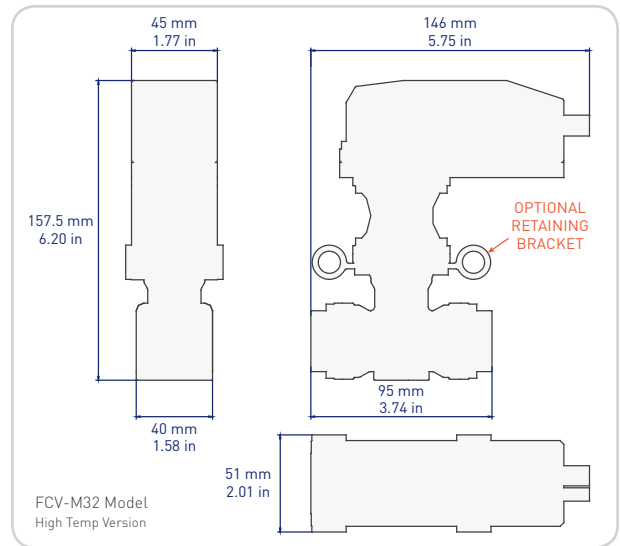

Wetted Materials

Materials in the flow path are 304 stainless steel and filled PTFE. O-ring material is selected for compatibility with your fluid and temperature range.

O-Ring Material	Temperature Range
Buna-N	-30 to 100°C
Viton®	-15 to 200°C
EPDM	-45 to 130°C
Silicone Rubber	-50 to 200°C

Tell Us About Your Application!

Proteus flow experts will work with you to specify the optimum flow control valve for your application.

- » Download and complete the FCV-M Series Application Check Sheet available at www.proteusind.com/flowcontrol
- » Contact us at sales@proteusind.com or (650) 964-4163

Liquid Distribution Manifolds

Tofpine manifolds are configurable to create compact and cost-effective liquid distribution systems.

- » www.proteusind.com/tofpine

PID Controllers


Florite controllers provide accurate and reliable process control.

- » www.proteusind.com/florite

Flow Meters

Add flow monitoring capability with a Proteus flow sensor calibrated for your fluid and temperature range.

- » www.proteusind.com/products



EXCEPTIONAL FLOW COMPONENTS BY **TOFCO**

WORLD-CLASS SUPPORT BY **Proteus**



Proteus Industries Inc.
340 Pioneer Way, Mountain View, CA 94041
Tel: (650) 964-4163 Fax: (650) 965-0304
www.proteusind.com sales@proteusind.com

Information in this document was correct at the time of printing; however, specifications are subject to change as Proteus Industries' continuous improvement processes establish new capabilities.

© Proteus Industries Inc. All rights reserved. All other company and product names may be trademarks of their respective companies.

FCVDS Rev 003 04/2013